


# MOTION AND FORCE

## LEARNING OBJECTIVES

**At the end of this chapter the students will be able to:**

Understand displacement from its definition and illustration.

Understand velocity, average velocity and instantaneous velocity.

Understand acceleration, average acceleration & instantaneous acceleration.

Understand the significance of area under velocity-time graph.

Recall Newton's Laws of motion.

Describe Newton's second law of motion as rate of change of momentum.

Define impulse as a product of impulsive force and time.

Describe law of conservation of momentum.

Describe the force produced due to flow of water.

Understand the process of rocket propulsion (simple treatment).

Understand projectile motion in a non-resistive medium.

Derive time of flight, maximum height and horizontal range of projectile motion.

## *Q.1 Define motion and rest.*

**Ans.** **MOTION**

If a body is changing its position with respect to its surroundings then the body is said to be in motion.

**REST**


If a body is not changing its position with respect to some observer then the body is said to be at rest.

## *Q.2 Define displacement and distance.*

**Ans.** **DISPLACEMENT**

The displacement is a change in the position of body from its initial position to its final position, or the shortest distance between two points is called displacement.

The displacement can be represented as a vector that describes how far and in what direction the body has been displaced from its initial position. The tail of displacement vector is located at the position where the displacement started and its tip is located at final position where displacement ended. If a body is moving along a curve as shown with A as its initial position and B as its final position then the displacement $\vec{d}$ of the body is represented by AB.




If $\vec{r}_1$ is position vector of A and $\vec{r}_2$ that of B then by head to tail rule

$$\vec{r}_1 + \vec{d} = \vec{r}_2$$

$$\therefore \quad \vec{d} = \vec{r}_2 - \vec{r}_1$$

It is a vector quantity and its SI unit is metre (m).

### Distance

It is the separation between the two points. It is a scalar quantity and its SI unit is metre (m).

## *Q.3 Define velocity and types of velocity.*

**Ans.** **VELOCITY**

The rate of change of displacement is known as velocity. Its direction is along the direction of displacement. So if $\vec{d}$ is the total displacement of the body in time t, then its average velocity during the interval t is defines as

$$\vec{V}_{av} = \frac{\vec{d}}{t}$$

It is a vector quantity and SI unit is m/s.

**Dimensions**

$$[\vec{V}] = \text{m/s}$$
$$= \text{L/T}$$
$$= [\text{LT}^{-1}]$$

### Types of Velocity

There are three types of velocity:

(i) Uniform velocity (ii) Variable velocity (iii) Instantaneous velocity

**(i) Uniform Velocity**

If a body covers equal displacements in equal interval of times, however small may be interval the velocity is said to be uniform velocity.

**(ii) Variable Velocity**

If a body covers equal displacement in unequal interval of times however small may be the interval then it is said to be variable velocity. And its motion is non-uniform.

**(iii) Instantaneous Velocity**

Velocity of a body at any instant is called instantaneous velocity. **(OR)** The instantaneous velocity is also defined as the limiting value of $\frac{\Delta \vec{d}}{\Delta t}$ as the time interval $\Delta t$ following the time $\Delta t$ approaches to zero. Mathematically

$$\vec{V}_{ins} = \lim_{\Delta t \to 0} \frac{\Delta \vec{d}}{\Delta t}$$

***Note:*** *If the instantaneous velocity does not change the body is said to be moving with uniform velocity.*

## *Q.4 Define acceleration with its units.*

**Ans.** **ACCELERATION**

The time rate of change of velocity of a body is called acceleration. As velocity is a vector so any change in velocity may be due to change in its magnitude or change in its direction or both. Consider a body whose velocity $\vec{V}_1$ at any time t changes to $\vec{V}_2$ in small time interval $\Delta t$, therefore the change in velocity $\Delta \vec{V}$ is

$$\Delta \vec{V} = \vec{V}_2 - \vec{V}_1$$

The average acceleration during time interval $\Delta t$ is given by

$$\vec{a}_{ave} = \frac{\vec{V}_2 - \vec{V}_1}{\Delta t} = \frac{\Delta \vec{V}}{\Delta t}$$


If the velocity of the body is increasing then its acceleration is positive while if the velocity of the body is decreasing then its acceleration is negative. The SI unit of acceleration is $m/s^2$.

**For Your Information**

**Typical Speeds**

| Speed, $ms^{-1}$ | Motion |
|---|---|
| 300 000 000 | Light, radio waves, x-rays, microwaves (in vacuum) |
| 210 000 | Earth-Sun travel around the galaxy |
| 29 600 | Earth around the Sun |
| 1 000 | Moon around the Earth |
| 980 | SR-71 reconnaissance jet |
| 333 | Sound (in air) |
| 267 | Commercial jet airliner |
| 62 | Commercial automobile (max.) |
| 37 | Falcon in a dive |
| 29 | Running cheetah |
| 10 | 100-metres dash (max.) |
| 9 | Porpoise swimming |
| 5 | Flying bee |
| 4 | Human running |
| 2 | Human swimming |

| 0.01 | Walking ant |
|---|---|




## Dimensions

$$[\vec{a}] = m/s^2$$

$$= L/T^2 = [LT^{-2}]$$

## Instantaneous Acceleration

Acceleration of a body at a particular instant is known as instantaneous acceleration.

$$\vec{a}_{ins} = \lim_{\Delta t \to 0} \frac{\Delta \vec{V}}{\Delta t}$$

***Note:*** *For a body moving with uniform acceleration, its average acceleration is equal to the instantaneously accelerated.*

## *Q.5 Explain velocity-time graph.*

**Ans.** **VELOCITY-TIME GRAPH**

Graphs which show the variation of velocity of an object with time are called velocity-time graphs. In such graphs, the time is taken along positive x-axis because it is the independent quantity.

**When velocity of car is constant**

When velocity of car is constant, its velocity–time graph is a horizontal straight line as shown in Fig. (i).

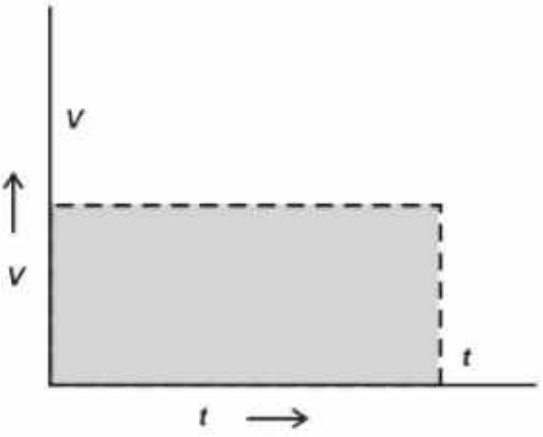



*Fig. (i)*

As the distance covered by the object is

$$S = vt$$

This distance moved by an object can also be found by using its velocity-time graph by calculating area under this graph. This area is shown shaded in Fig. (i).

As it is a rectangle

$\therefore$ Area under the graph = Height x Width

$$H \times W = vt$$

$$A = vt$$

Hence distance covered = Area under V – t graph.

**When car moves with constant acceleration**

When the car moves with constant acceleration, the velocity-time graph is a straight line which rises the same height for equal intervals of time as shown in Fig. (ii).

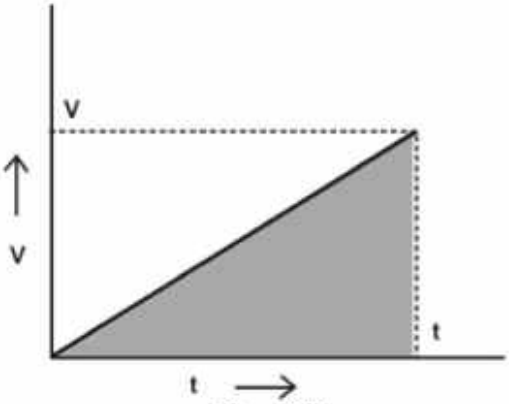


Fig. (ii)

Here the velocity of the object increased uniformly from O to V in time "t". Therefore

$$\therefore \quad V_{av} = \frac{0 + V}{2}$$

$$= \frac{1}{2} V$$

$$\therefore \quad S = V_{av}\, t$$

$$S = \frac{1}{2} V\, t$$

Now we calculate area under velocity-time graph which is equal to the area of the triangle shaded as shown in Fig. (ii).

$$\text{Area of } \Delta = \frac{1}{2} (\text{Base}) (\text{Height})$$

$$= \frac{1}{2} (t) (v)$$

$$= \frac{1}{2} v\, t$$

Hence distance covered = area under V–t graph

"In this case average acceleration of an object can be found by finding the slope of its velocity–time graph".

***Note:*** *The area between the velocity–time graph and the time–axis is numerically equal to the distance covered by the object.*

**When the car moves with increasing acceleration**

When the car moves with increasing acceleration (non–uniform velocity) the velocity-time graph is a curve as shown in Fig. (iii).

The point A on the graph corresponds to time t. The magnitude of the Instantaneous acceleration at this instant is numerically equal to the slope of the tangent at point A on the velocity-time graph of the object as shown in Fig. (iii).




Fig. (iii)

## REVIEW OF EQUATIONS OF UNIFORMLY ACCELERATED MOTION

Suppose an object is moving with uniform acceleration 'a' along a straight line. If initial velocity of the object is '$V_i$' and final velocity '$V_f$' after a time interval t. And 'S' is distance covered then we have

$$V_f = V_i + at \qquad \ldots\ldots (1)$$

$$S = \left(\frac{V_f + V_i}{2}\right) x\, t \quad \ldots\ldots (2)$$

$$S = V_i t + \frac{1}{2} at^2 \quad \ldots\ldots (3)$$

$$V_f^2 = V_i^2 + 2a S \quad \ldots\ldots (4)$$

These equations are useful only for linear motion with uniform acceleration.

When the object moves along the straight line, the direction of motion does not change. In this case all the vector can be manipulated like scalars. In such problems the direction of initial is taken as positive. A negative sign is assigned to quantities where direction is opposite to that of initial velocity.

In the absence of air resistance, all objects near the surface of earth, moves towards the earth with a uniform acceleration. This acceleration, is known as acceleration due to gravity. It is denoted by 'g'. Its average value near the earth surface is taken as 9.8 $ms^{-2}$ in the down ward direction.


***Note:*** *The equations for uniformly accelerated motion can also be applied to free fall motion of the objects by replacing 'a' by 'g'.*

## *Q.6 State and explain Newton's laws of motion.*

**Ans.** ## NEWTON'S LAWS OF MOTION

Newton's laws are empirical laws deduced from experiments. They were clearly stated for the 1st time by Sir Isaac Newton who published them in 1687 in his famous book called "Principia". Newton's laws are applicable only for speed which is negligible compared to speed of light. For very fast moving objects, such as atomic particle in an accelerator, relativistic mechanics developed by Einstein is applicable.


**Do You Know?**

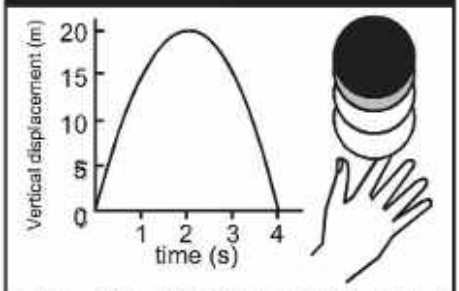


**How the displacement of a vertically thrown ball varies with time.**

## NEWTON'S FIRST LAW OF MOTION

A body at rest will remain at rest and a body moving with uniform velocity will continue to do so, unless acted upon by some unbalanced external force. This is also known as Law of "Inertia".

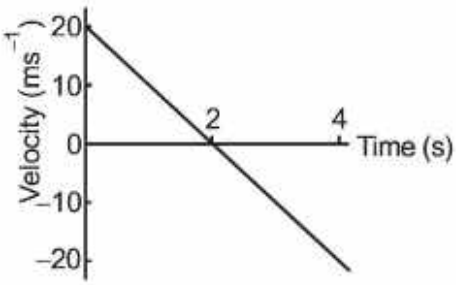


**How the velocity of a vertically thrown ball varies with time? Velocity is upwards positive.**

### Inertia

The property of an object tending to maintain to the state of rest or state of uniform motion is known as object's inertia. The mass of the object is a quantitative measure of its inertia.

### Frame of Reference

The space bounded by three mutually perpendicular lines is known as frame of reference. There are two types:

**(i) Inertial frame of reference**

The frame of reference in which Newton's laws of motions holds is known as inertial frame of reference. It is non–accelerated frame of reference.

**(ii) Non-inertial frame of reference**

A frame of reference in which Newton's laws of motions does not hold is known as non-inertial frame of reference. It is accelerated frame of reference.

e.g., A frame of reference stationed on earth is approximately an inertial frame of reference.

## NEWTON'S SECOND LAW OF MOTION

A force applied on a body produces acceleration in its own direction. The acceleration produced is directly proportional with the applied force and inversely proportional with the mass of the body.

Mathematically, it is expressed as

$$\therefore \quad \vec{a} \propto \vec{F} \qquad \ldots\ldots\ldots (i)$$

$$\vec{a} \propto \frac{1}{m} \qquad \ldots\ldots\ldots (ii)$$

Combining (i) and (ii)

$$\vec{a} \propto \frac{\vec{F}}{m}$$

$$\vec{a} = k\frac{\vec{F}}{m}$$

where K = constant of proportionality.

If F = 1 N , m = 1 kg


a = 1 m/s$^2$

then K = 1

If S.I. units are used then


$$\therefore \quad \vec{F} = m\vec{a}$$

**Do You Know?**

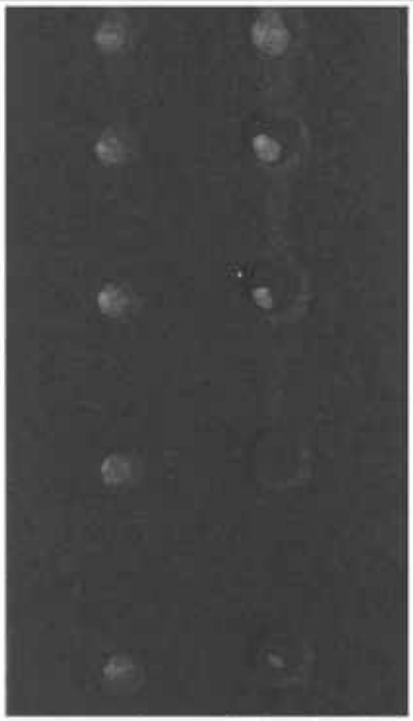

At the surface of the Earth, in situations where air friction is negligible, objects fall with the same acceleration regardless of their weights.

**For Your Information**

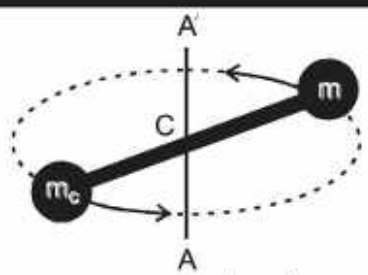


A measurement of mass independent of gravity. The unknown mass m and a calibrated mass $m_c$ are mounted on a light weight rod. If the masses are equal, the rod will rotate without wobble about its centre.

**Point to Ponder**

A car accelerates along a road. Which force actually moves the car?

Ans Force of friction

## NEWTON'S THIRD LAW OF MOTION

Action and reaction are equal but in opposite direction.

For example, whenever an interaction occurs between two objects, each object exerts the same force on the other, but in the opposite direction and for the same length of time. Each force in action-reaction pair acts only on one of the two bodies, the action and reaction forces never act on the same body.

***Q.7 What is the linear momentum? Also define its units.***

## Ans. MOMENTUM (LINEAR MOMENTUM)

It is defined as the "the product of mass and velocity of the object."

It is denoted by "P".

Mathematically

$$\vec{P} = m\vec{V}$$

or The quantity of motion in a moving body is called linear momentum.

Linear momentum is a vector quantity and has the direction in direction of velocity.

The magnitude of momentum depends upon the mass of body and velocity of the body.

### Unit

The SI unit of momentum is kg m/s. It is also Ns.

### Dimensions

$$[P] = \text{Kg m/s}$$
$$= ML/T$$
$$= [MLT^{-1}]$$

**Q. Show that kg m/s is equal to Ns?**

**Ans.** Kg m/s = Ns

As L.H.S. = Kg m/s

Multiple and divide by s

$$= \text{Kg m/s} \times \frac{s}{s}$$
$$= [\text{Kg m/s}^2] \times s$$
$$= Ns$$
$$= R.H.S$$

***Q.8 How force and linear momentum are related? (OR) State Newton's second law of motion in terms of momentum.***

## Ans. MOMENTUM AND NEWTON'S SECOND LAW OF MOTION

Consider a body of mass 'm' moving with an initial velocity $\vec{V}_i$ . Suppose an external force $\vec{F}$ acts upon if for time 't' after which velocity becomes $\vec{V}_f$.

As, $$\vec{V}_f = \vec{V}_i + \vec{a}\,t$$

$$\vec{a}\,t = \vec{V}_f - \vec{V}_i$$

$$\vec{a} = \frac{\vec{V}_f - \vec{V}_i}{t} \quad \ldots\ldots\ldots (1)$$

From Newton's 2nd Law

**Interesting Information**



Throwing a package onto shore from a boat that was previously at rest causes the boat to move outward from shore (Newton's third law).

$$\vec{F} = m\vec{a}$$

$$\vec{a} = \frac{\vec{F}}{m} \qquad \ldots\ldots\ldots (2)$$

**Point to Ponder**

Which will be more effective in knocking a bear down.
i. a rubber bullet or
Ii. a lead bullet of the same Momentum

***Ans.*** Rubber bullet will be more effective in knocking a bear down because its rate of change of momentum will be greater than that of lead bullet.

From equation (1) and (2)

$$\frac{\vec{F}}{m} = \frac{\vec{V}_f - \vec{V}_i}{t}$$

$$\vec{F} = \frac{m\vec{V}_f - \vec{V}_i}{t}$$

$$\vec{F} = \frac{\vec{P}_f - \vec{P}_i}{t}$$

$$\vec{F} = \frac{\vec{\Delta P}}{t}$$

Hence second law of motion in term of momentum can also be stated as "the time rate of change of momentum of a body equals the applied force."

## *Q.9 Define impulse and show that it is change in momentum.*

## Ans. IMPULSE

When a very large force acts on a body for a very short interval of time the momentum of the body changes. The product of such a force and time is called the impulse. It is denoted by I and it is a vector quantity.

$$\therefore \text{ Impulse } = \vec{I} = \vec{F} \times t$$


$$\text{As } \quad \vec{F} = \frac{m\vec{V}_f - m\vec{V}_i}{t}$$


$$\vec{F} \times t = m\vec{V}_f - m\vec{V}_i$$

$$\therefore \quad \text{Impulse} = \text{change in momentum } (\vec{\Delta P})$$

**Unit:** Its unit is $Kg\ ms^{-1}$ or Ns.

**Point to Ponder**



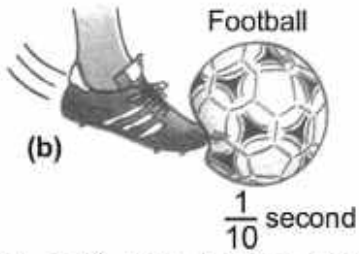
Which hurt you in the above situations (a) or (b) and think why?

**Point to Ponder**

Does a moving object have impulse?

*Ans.* There are two possibilities:

i. If a body is moving with constant velocity then change in momentum will be zero therefore impulse will be zero but if a body moves with variable velocity then there will be change in momentum and then the moving body will have impulse.

**Do You Know?**

Your hair acts like a cumple zone on your skull. A force of 5 N might be enough to fracture your naked skull (cranium), but with a covering of skin and hair, a force of 50 N would be needed.

## *Q.10 State and explain law of conservation of linear momentum.*

## Ans. LAW OF CONSERVATION OF MOMENTUM

### Isolated System


It is a system on which no external agency exerts any force. e.g., The molecules of a gas enclosed in a glass vessel at constant temperature constitute an isolated system. The molecules can collide with one another because of their random motion but, no external force can exert on them.

### Statement

This law states that the total linear momentum of an isolated system remains constant.

**Explanation**

Consider an isolated system of two smooth hard interacting balls of masses $m_1$ and $m_2$, moving along the same straight line, in the same direction, with velocities $\vec{V}_1$ and $\vec{V}_2$ respectively. Both the balls collide and after collision, the ball of mass $m_1$ moves with velocity $\vec{V}_1'$ and $m_2$ moves with velocity $\vec{V}_2'$ in the same direction as shown in figure.

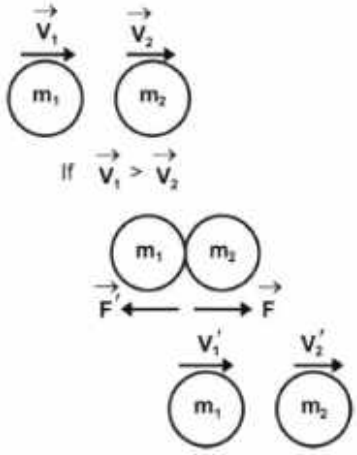


To find the change in momentum we use

$$\vec{F} \times t = m\vec{V}_f - m\vec{V}_i$$

For mass $m_1$

$$\vec{F} \times t = m_1\vec{V}_1' - m_1\vec{V}_1 \quad \ldots\ldots\ldots (1)$$

Similarly for mass $m_2$

$$\vec{F}' \times t = m_2\vec{V}_2' - m_2\vec{V}_2 \quad \ldots\ldots\ldots (2)$$

Adding (1) and (2)

$$\vec{F} \times t + \vec{F}' \times t = m_1\vec{V}_1' - m_1\vec{V}_1 + m_2\vec{V}_2' - m_2\vec{V}_2$$

$$(\vec{F} + \vec{F}')\, t = m_1\vec{V}_1' - m_1\vec{V}_1 + m_2\vec{V}_2' - m_2\vec{V}_2$$

Since the action F is equal and opposite to the reaction force F'

i.e., $\vec{F}' = -\vec{F}$

$$\therefore \quad t(\vec{F} - \vec{F}) = m_1\vec{V}_1' - m_1\vec{V}_1 + m_2\vec{V}_2' - m_2\vec{V}_2$$

$$0 = m_1\vec{V}_1' - m_1\vec{V}_1 + m_2\vec{V}_2' - m_2\vec{V}_2$$

$$m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\vec{V}_1' + m_2\vec{V}_2'$$

which means that total initial momentum of the system before collision is equal to the final momentum of the system after collision Consequently the total change in momentum of the isolated two ball system is zero.

**Point to Ponder**

**What is the effect on the speed of a fighter plane chasing another when it opens fire? What happens to the speed of pursued plane when it returns the fire?**

***Ans.*** **The speed of fighter plane chasing another will decrease due to law of conservation of momentum. While the speed of pursued plane will increase.**

**Do You Wear Seat Belts?**



**When a moving car stops quickly, the passengers move forward towards the windshield. Seat belts change the forces of motion and prevent the passengers from moving. Thus the chance of injury is greatly reduced.**

**Do You Know?**



A motorcycle's safety helmet is padded so as to extend the time of any collision to prevent serious injury.

## *Q.11 Define elastic and inelastic collision.*

## Ans. ELASTIC AND INELASTIC COLLISIONS

### Collision

When two or more object come close enough so that there is some sort of interaction between them, with or without the presence of external force, we say a collision has been taken place between the objects.

There are two types of collision:

1. Head-on collision, such a collision in which after collision balls move in same direction as they move before collision.
2. Oblique collision (direction of balls changes after collision).

### Elastic Collision

In the ideal case when no K.E is lost, the collision is said to be perfectly elastic.

For example, when a hard ball is dropped on to a marble floor, it rebounds to very nearly the initial height. It loses negligible amount of energy in the collision with the floor.

### Inelastic Collision


A collision in which the Kinetic Energy of the system is not conserved is called Inelastic Collision.

When two tennis balls collide then after collision, they will rebound with velocities less than the velocities before the impact. During this process, a portion of K.E. is lost, partly due to friction as the molecules in the ball move past one another when the balls distort and partly due to its change into heat and sound energies.


***Note:*** Momentum and total energy are conserved in all types of collisions.

***Q.12 Discuss elastic collision in one dimension and prove that speed of approach speed of released. (OR) Derive the formula of final velocities of two balls after an elastic collision in one dimensions.***

**Ans.** **ELASTIC COLLISION IN ONE DIMENSION**



Before collision



After collision

Consider two smooth, non–rotating balls of masses $m_1$ and $m_2$ moving initially with velocities $\vec{V}_1$ and $\vec{V}_2$ respectively, in the same direction. They collide and after collision, they move along the same straight line without rotation. Let their velocities after collision be $\vec{V}_1'$ and $\vec{V}_2'$ respectively, as shown in figure.

Consider direction of the velocity and momentum to the right.

Since the collision is elastic therefore both momentum and K.E. are conserved.

By Appling Law of conservation of momentum

$$m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\vec{V}_1' + m_2\vec{V}_2' \quad \ldots\ldots\ldots (1)$$

$$m_1\vec{V}_1 - m_1\vec{V}_1' = m_2\vec{V}_2' - m_2\vec{V}_2$$

$$m_1(\vec{V}_1 - \vec{V}_1') = m_2(\vec{V}_2' - \vec{V}_2) \quad \ldots\ldots\ldots (2)$$

Using law of conservation of K.E.

$$\frac{1}{2}m_1\vec{V}_1^2 + \frac{1}{2}m_2\vec{V}_2^2 = \frac{1}{2}m_1\vec{V}_1'^2 + \frac{1}{2}m_2\vec{V}_2'^2$$

$$\frac{1}{2}\left(m_1\vec{V}_1^2 + m_2\vec{V}_2^2\right) = \frac{1}{2}\left(m_1\vec{V}_1'^2 + m_2\vec{V}_2'^2\right)$$

$$m_1\vec{V}_1^2 + m_2\vec{V}_2^2 = m_1\vec{V}_1'^2 + m_2\vec{V}_2'^2$$

$$m_1\vec{V}_1^2 - m_1\vec{V}_1'^2 = m_2\vec{V}_2'^2 - m_2\vec{V}_2^2$$

$$m_1\left(\vec{V}_1^2 - \vec{V}_1'^2\right) = m_2\left(\vec{V}_2'^2 - \vec{V}_2^2\right)$$

$$m_1(\vec{V}_1 - \vec{V}_1')(\vec{V}_1 + \vec{V}_2') = m_2(\vec{V}_2' - \vec{V}_2)(\vec{V}_2' + \vec{V}_2) \quad \ldots\ldots\ldots (3)$$

Dividing equation (3) by equation (2)

$$\frac{m_1(\vec{V}_1 - \vec{V}_1')(\vec{V}_1 + \vec{V}_1')}{m_1(\vec{V}_1 - \vec{V}_1')} = \frac{m_2(\vec{V}_2' - \vec{V}_2)(\vec{V}_2' + \vec{V}_2)}{m_2(\vec{V}_2' - \vec{V}_2)}$$

$$\vec{V}_1 + \vec{V}_1' = \vec{V}_2' + \vec{V}_2 \qquad \ldots\ldots\ldots (4)$$

$$\vec{V}_1 - \vec{V}_2 = \vec{V}_2' - \vec{V}_1'$$

$$\vec{V}_1 - \vec{V}_2 = -(\vec{V}_1' - \vec{V}_2')$$

$$\vec{V}_{rel} = -\vec{V}_{rel}'$$

Before collision $(\vec{V}_1 - \vec{V}_2)$ is the velocity of first ball relative to second ball. Similarly $(\vec{V}_2' - \vec{V}_1')$ is the velocity of second ball relative to first ball after collision. It means that relative velocities before and after the collision has the same magnitude but are reversed after the collision. In other words, the magnitude of relative velocity of approach is equal to the magnitude of relative velocity of separation. i.e.,

$$\left\{\begin{array}{l}\text{Magnitude of relative}\\ \text{velocity of approach}\end{array}\right\} = \left\{\begin{array}{l}\text{Magnitude of relative}\\ \text{velocity of separation}\end{array}\right\}$$

## Calculation of Velocity $\vec{V}_1'$ and $\vec{V}_2'$:

From equation (4)

$$\vec{V}_1 + \vec{V}_1' = \vec{V}_2' + \vec{V}_2$$

$$\vec{V}_2' = \vec{V}_1 + \vec{V}_1' - \vec{V}_2$$

Put this value in equation (1)

$$m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\vec{V}_1' + m_2\left(\vec{V}_1 + \vec{V}_1' - \vec{V}_2\right)$$

$$m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\vec{V}_1' + m_2\vec{V}_1 + m_2\vec{V}_1' - m_2\vec{V}_2$$

$$m_1\vec{V}_1 + m_2\vec{V}_2 + m_2\vec{V}_2 - m_2\vec{V}_1 = (m_1 + m_2)\vec{V}_1'$$

Dividing both sides by $(m_1 + m_2)$

$$\frac{(m_1 - m_2)\vec{V}_1 + 2m_2\vec{V}_2}{(m_1 + m_2)} = \frac{(m_1 + m_2)\vec{V}_1'}{(m_1 + m_2)}$$

$$\vec{V}_1' = \frac{(m_1 - m_2)\vec{V}_1}{(m_1 + m_2)} + \frac{2m_2\vec{V}_2}{(m_1 + m_2)} \qquad \ldots\ldots\ldots (5)$$

From equation (4)

$$\vec{V}_1' = \vec{V}_2' + \vec{V}_2 - \vec{V}_1$$

**Do You Know?**



If another car crashes into back of yours, the head-rest of the car seat can save you from serious neck injury. It helps to accelerate your head forward with the same rate as the rest of your body.

Put this value in equation (1)

$$\therefore \quad m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\vec{V}_1' + m_2\vec{V}_2'$$

$$m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\left(\vec{V}_2' + \vec{V}_2 - \vec{V}_1\right) + m_2\vec{V}_2'$$

$$m_1\vec{V}_1 + m_2\vec{V}_2 = m_1\vec{V}_2' + m_1\vec{V}_2 - m_1\vec{V}_2 + m_2\vec{V}_2'$$

$$m_1\vec{V}_1 + m_2\vec{V}_2 + m_1\vec{V}_1 - m_1\vec{V}_1 = (m_1 + m_2)\vec{V}_2'$$

$$2m_1\vec{V}_1 + (m_2 - m_1)\vec{V}_2 = (m_1 + m_2)\vec{V}_2'$$

Dividing both sides by $(m_1 + m_2)$

$$\therefore \quad \vec{V}_2' = \frac{2m_1\vec{V}_1}{m_1 + m_2} + \frac{(m_2 - m_1)\vec{V}_2}{m_1 + m_2} \qquad \ldots\ldots\ldots (6)$$

**Point to Ponder**


In thrill machine rides at amusement parks, there can be an acceleration of 3g or more. But without head rests, acceleration like this would not be safe. Think why not?

## *Q.13 Discuss the various cases of elastic collision in dimensions.*

**Ans.** **SPECIAL CASES:**

**Case-I:** When $m_1 = m_2 = m$

Putting this in equation (5) and equation (6)

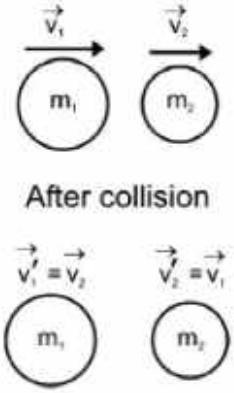


$$\therefore \quad \vec{V}_1' = \frac{(m - m)\vec{V}_1}{m + m} + \frac{2m_2\vec{V}_2}{m + m}$$

$$= 0 + \frac{2m\vec{V}_2}{2m} = \frac{2m\vec{V}_2}{2m}$$

$$\vec{V}_1' = \vec{V}_2$$


Now $$\vec{V}_2' = \frac{2m\vec{V}_1}{m + m} + \frac{(m - m)\vec{V}_2}{m + m}$$

$$= \frac{2m\vec{V}_1}{2m} + 0$$

$$\vec{V}_2' = \vec{V}_1$$

It means that when two balls of equal mass collide elastically, they simply exchange their velocities.


**Case-II:** When $m_1 = m_2 = m$ and $\vec{V}_2 = 0$ i.e., target ball at rest





Put this value in eq. (5) and (6)

$$\therefore \quad \vec{V}_1' = \frac{(m-m)\vec{V}_1}{m+m} + \frac{2m\,(0)}{m+m}$$

$$= 0 + 0$$




$$\vec{V}_1' = 0$$




Now, $$\vec{V}_2' = \frac{2m\vec{V}_1}{m+m} + \frac{(m-m)\,(0)}{m+m}$$

$$= \frac{2m\vec{V}_1}{2m} + 0$$

$$\vec{V}_2' = \vec{V}$$

In this case the ball $m_1$ comes to rest after collision while ball $m_2$ that was at rest began to move with $\vec{V}_1$.

**Case-III:** When a light body collides with a massive body which is at rest.

i.e., $\vec{V}_2 = 0$

also $m_2 >> m_1$


i.e., $m_1 \simeq 0$

Putting this value in equation (5) and equation (6).

$$\therefore \quad \vec{V}_1' = \frac{0-m_2}{0+m_2}\vec{V}_1 + \frac{2m_2}{0+m_2}(0)$$

$$= -\frac{m_2}{m_2}\vec{V}_1$$


$$\vec{V}_1' = -\vec{V}_1$$




Also $$\vec{V}_2' = \frac{m_2-m_1}{m_1+m_2}\vec{V}_2 + \frac{2m_1\vec{V}_1}{m_1+m_2}$$

$$= 0 + \frac{2\,(0)\,\vec{V}_1}{0+m_2}$$

$$= 0 + 0$$




$$\vec{V}_2' = 0$$

This means that $m_1$ will bounce back with same velocity while $m_2$ remains stationary.

**Case-IV:** When a massive body collides with a lighter body at rest.




# MOTION AND FORCE

***Each question has four possible answers, encircled the correct answer:***

**1.** If a body changes its position with respect to its surroundings then it is said to be in:

**(a)** Rest **(b)** Motion

**(c)** Momentum **(d)** Force

**2.** If a body does not change its position with respect to its surroundings then it is said to be at:

**(a)** Rest **(b)** Motion

**(c)** Momentum **(d)** Force

**3.** The change in position of a body from initial to final position is called:

**(a)** Velocity **(b)** Displacement

**(c)** Acceleration **(d)** Speed

**4.** The rate of change of displacement is called:

**(a)** Velocity **(b)** Displacement

**(c)** Acceleration **(d)** Speed

**5.** The rate of change of distance is called:

**(a)** Velocity **(b)** Displacement

**(c)** Acceleration **(d)** Speed

**6.** The SI unit of velocity is:

**(a)** m/s **(b)** m-s

**(c)** s/m **(d)** None of these

**7.** The dimensions of velocity are:

**(a)** $[LT^2]$ **(b)** $[L^{-1}]$

**(c)** $[LT^{-1}]$ **(d)** $[L^2T]$

**8.** The expression $\underset{\Delta t \to 0}{\text{Limit}} \frac{\Delta \vec{d}}{\Delta t}$ represents:

**(a)** Average velocity **(b)** Displacement

**(c)** Instantaneous velocity **(d)** Acceleration

**9.** If the velocity of the body is increasing then its acceleration will be:

**(a)** Zero **(b)** Maximum

**(c)** Negative **(d)** Positive

**10.** The rate of change of velocity is called:

**(a)** Displacement **(b)** Velocity

**(c)** Speed **(d)** Acceleration

**11.** When the velocity of a body is increases at constant rate, it is said to be moving with:

**(a)** Constant velocity **(b)** Constant speed

**(c)** Constant displacement **(d)** None of these

**12.** With the help of velocity-time graph, we can find:

**(a)** Distance **(b)** Time

**(c)** Velocity **(d)** Momentum

**13.** The area under the curve of velocity-time graph gives:

**(a)** Acceleration **(b)** Velocity

**(c)** Distance **(d)** Direction

**14.** The motion and rest are:

**(a)** Relative **(b)** Discrete

**(c)** Absolute **(d)** None of these

**15.** When a body moves in straight line, displacement is:

**(a)** Circular **(b)** Curved

**(c)** Along the path **(d)** None of these

**16.** If the instantaneous velocity does not change, then the body is said to be moving with:

**(a)** Average velocity **(b)** Average acceleration

**(c)** Uniform velocity **(d)** Average speed

**17.** A man on the top of a tower throws an object upward with a certain velocity and allows another object to fall freely. The two objects strikes the Earth with:

**(a)** Different velocities **(b)** Same velocities

**(c)** Uniform velocities **(d)** None of these

**18.** If the velocity time graph becomes steeper and steeper then acceleration:

**(a)** Remains constant **(b)** Decreases

**(c)** Increases **(d)** None of these

**19.** Acceleration of a body sliding down a smooth inclined plane of constant angle is said to be:

**(a)** Variable **(b)** Increasing

**(c)** Decreasing **(d)** Constant

**20.** The dimensions of acceleration are:

**(a)** $[LT^{-1}]$ **(b)** $[LT^{2}]$

**(c)** $[L^{2}T]$ **(d)** $[LT^{-2}]$

**21.** Slope of velocity-time graph represents:

**(a)** Distance **(b)** Displacement

**(c)** Acceleration **(d)** None of these

**22.** A paratrooper moves downward with:

**(a)** Zero acceleration **(b)** Negative acceleration

**(c)** Positive acceleration **(d)** Acceleration due to gravity

**23.** If a body is moving with constant velocity of 20 m/s towards North then its acceleration is:

**(a)** $5\ m/s^2$ **(b)** $9\ m/s^2$

**(c)** $10\ m/s^2$ **(d)** Zero

**24.** Acceleration in a body is always produced in the direction of:

**(a)** Force **(b)** Velocity

**(c)** Weight **(d)** None of these

**25.** The velocity of a body at any instant of time is called:

**(a)** Average speed **(b)** Uniform velocity

**(c)** Instantaneous velocity **(d)** None of these

**26.** The unit of acceleration in SI unit is:

**(a)** m/s **(b)** $m/s^2$

**(c)** m-s **(d)** $\frac{1}{m\text{-}s^2}$

**27.** If a body covers equal displacement in equal interval of time then velocity of the body is:

**(a)** Uniform **(b)** Average

**(c)** Instantaneous **(d)** None of these

**28.** If a body covers unequal displacement in unequal interval of time then velocity of the body is:

**(a)** Uniform **(b)** Variable

**(c)** Instantaneous **(d)** None of these

**29.** The acceleration of a body at a particular instant of time is:

**(a)** Uniform acceleration **(b)** Variable acceleration

**(c)** Instantaneous acceleration **(d)** None of these

**30.** Graphs which are used to describe the variation of velocity with time are called:

**(a)** Speed-time graph **(b)** Velocity-time graph

**(c)** Distance-time graph **(d)** None of these

**31.** If a body is moving with constant acceleration then the velocity-time graph is:

**(a)** Parabola **(b)** Hyperbola

**(c)** Straight line **(d)** None of these

**32.** In displacement-time graph, if the slope of line increases then:

**(a)** The acceleration increases **(b)** The velocity becomes greater

**(c)** The speed decreases **(d)** None of these

**33.** The average and instantaneous accelerations will be equal when a body moves with:

**(a)** Constant acceleration **(b)** Variable acceleration

**(c)** Retardation **(d)** Positive acceleration

**34.** A frame of reference at rest is called:

**(a)** Non-inertial frame **(b)** Inertial frame

**(c)** Accelerated frame **(d)** None of these

**35.** Those frame of references which are moving with some acceleration is called:

**(a)** Non-inertial frame **(b)** Inertial frame

**(c)** Both (a) and (b) **(d)** None of these

**36.** If $\vec{\Delta V}$ is the change in the velocity of a body during time $\Delta t$, then its acceleration is given by:

**(a)** $\vec{a} = \frac{\vec{\Delta x}}{\Delta t}$ **(b)** $\vec{a} = \frac{\Delta t}{\vec{\Delta V}}$

**(c)** $\vec{a} = \frac{\vec{\Delta V}}{\Delta t}$ **(d)** $\vec{a} = \vec{\Delta V} \cdot \Delta t$

**37.** The laws of motion shows the relation between:

**(a)** Distance and velocity **(b)** Displacement and velocity

**(c)** Mass and velocity **(d)** Force and acceleration

**38.** The quantity of matter in a body is called:

**(a)** Force **(b)** Mass

**(c)** Displacement **(d)** Speed

**39.** Newton's first law of motion is also called:

**(a)** Law of inertia **(b)** Law of momentum

**(c)** Ampere's law **(d)** None of these

**40.** The property of a body due to which it opposes its state of rest or of motion is called:

**(a)** Momentum **(b)** Torque

**(c)** Weight **(d)** Inertia

**41.** Laws of motion are valid in a frame which is:

**(a)** In motion **(b)** Inertial

**(c)** Both (a) and (b) **(d)** None of these

**42.** Laws of motion are not valid in a frame which is:

**(a)** Inertial **(b)** Non-inertial

**(c)** In the space **(d)** None of these

**43.** Newton's laws are applicable on the objects which have:

**(a)** High speed and light mass **(b)** Low speed and light mass

**(c)** Low speed and heavy mass **(d)** None of these

**44.** The magnitude of acceleration produced in an object is inversely proportional with:

**(a)** Momentum **(b)** Velocity

**(c)** Mass **(d)** Applied force

**45.** The SI unit of force is:

**(a)** Newton **(b)** Kilogram

**(c)** Joule **(d)** Metre

**46.** The force which produces an acceleration of 1 $m/s^2$ in an object of mass 1 kg is equal to:

**(a)** One Ampere **(b)** One Watt

**(c)** One Newton **(d)** One Coulomb

**47.** If the force acting on a body is doubled, then acceleration becomes:

**(a)** Half **(b)** Constant

**(c)** One forth **(d)** Double

**48.** A mass of 10 kg moves with an acceleration of 10 $m/s^2$, the force on it is:

**(a)** 5 N **(b)** 100 N

**(c)** 50 N **(d)** 25 N

**49.** Inertia of a body is measured in terms of its:

**(a)** Weight **(b)** Force

**(c)** Mass **(d)** Acceleration

**50.** The rate of change of momentum is equal to:

**(a)** Applied force **(b)** Torque

**(c)** Distance **(d)** Time

**51.** The product of mass and velocity is called:

**(a)** Impulse **(b)** Momentum

**(c)** Force **(d)** Power

**52.** The expression $I = \vec{F} \times \Delta t$ represents:

**(a)** Momentum **(b)** Impulse

**(c)** Force **(d)** Power

**53.** Impulse is equal to the:

**(a)** Change in momentum **(b)** Change of force

**(c)** Change of time **(d)** Change of velocity

**54.** The dimensions of weight are:

**(a)** $[LT^{-1}]$ **(b)** $[MLT^{-2}]$

**(c)** $[M^2LT]$ **(d)** $[ML^2T]$

**55.** SI unit of impulse is:

**(a)** kg m/s **(b)** N-m

**(c)** Ns **(d)** None of these

**56.** The motion of the rocket in the space is according to the law of conservation of:

**(a)** Energy **(b)** Mass

**(c)** Linear momentum **(d)** None of these

**57.** A force of 100 N acts in a body for 5 seconds, what will be the change in momentum:

**(a)** 20 N-s **(b)** 500 N-s

**(c)** 100 N-s **(d)** 1000 N-s

**58.** A body thrown upward making an angle with the horizontal and moving freely under the action of gravity is called:

**(a)** Linear motion **(b)** Projectile motion

**(c)** Both (a) and (b) **(d)** None of these

**59.** The path followed by the projectile is called:

**(a)** Height of projectile **(b)** Range of projectile

**(c)** Trajectory **(d)** None of these

**60.** During projectile motion, the horizontal component of velocity:

**(a)** Remains constant **(b)** Increases

**(c)** Decreases **(d)** Becomes zero

**61.** The trajectory of a projectile is:

**(a)** Circle **(b)** Parabola

**(c)** Hyperbola **(d)** Straight line

**62.** The vertical component of velocity at highest point during projectile motion is:

**(a)** Maximum **(b)** Constant

**(c)** Zero **(d)** Same

**63.** A foot ball kicked in a air is the example of:

**(a)** Linear motion **(b)** Circular motion

**(c)** Rotational motion **(d)** Projectile motion

**64.** The acceleration along x-direction in case of projectile is:

**(a)** Zero **(b)** Equal to gravity

**(c)** Maximum **(d)** Constant

**65.** Motion of a projectile is:

**(a)** One dimension **(b)** Two dimension

**(c)** Three dimension **(d)** None of these

**66.** Initial vertical velocity of a projectile is given by:

**(a)** $v_i \cos\theta$ **(b)** $v_i \sin\theta$

**(c)** $v_i^2 \sin\theta$ **(d)** $v_i \tan\theta$

**67.** The magnitude of the velocity of the projectile is:

**(a)** $v = \sqrt{v_x^2 + v_y^2}$ **(b)** $v = \sqrt{v_x^2 - v_y^2}$

**(c)** $v = v_x^2 + v_y^2$ **(d)** None of these

**68.** The expression for maximum height is:

**(a)** $\frac{v_i^2 \sin^2\theta}{2g}$ **(b)** $\frac{v_i^2 \sin\theta}{g}$

**(c)** $\frac{v_i \sin^2\theta}{2g}$ **(d)** $\frac{v_i \sin\theta}{2g}$

**69.** The SI unit of acceleration is:

**(a)** $ms^2$ **(b)** $m/s^2$

**(c)** $m^2s$ **(d)** None of these

**70.** The horizontal component of velocity of a projectile thrown with initial velocity 300 m/s at an angle of 90° will be:

**(a)** 450 m/s **(b)** 200 m/s

**(c)** 150 m/s **(d)** Zero

**71.** Height attained by the projectile will be maximum when the angle of projection is:

**(a)** 30° **(b)** 60°

**(c)** 45° **(d)** 90°

**72.** Velocity of the projectile at the maximum height attained when projected with velocity $v_i$ is:

**(a)** $v_x = v_i \sin\theta$ **(b)** $v_H = v_i \cos\theta$

**(c)** Zero **(d)** $v_i$

**73.** A body falling freely strikes the ground in 5 seconds, distance covered by it in 5 second is:

**(a)** 122.5 m **(b)** 25 m

**(c)** 24.5 m **(d)** 34.5 m

**74.** The total time for which the projectile remains in air is called:

**(a)** Time of projectile **(b)** Time period

**(c)** Time of flight **(d)** Time constant

**75.** The time of flight is given by:

**(a)** $\frac{2v_i \sin\theta}{g}$ **(b)** $\frac{v_i \sin\theta}{g}$

**(c)** $\frac{v_i^2 \sin\theta}{2g}$ **(d)** $\frac{v_i \sin\theta}{2g}$

**76.** The angle of projection to cover maximum horizontal range is:

**(a)** 90° **(b)** 120°

**(c)** 18° **(d)** 45°

**77.** The expression for maximum range of projectile is given by:

**(a)** $\frac{v_i^2}{g}$ **(b)** $\frac{2v_i}{g}$

**(c)** $\frac{2v_i^2}{g}$ **(d)** $\frac{v_i^2}{2g}$

**78.** The path followed by the ballistic missile is called:

**(a)** Missile displacement **(b)** Ballistic trajectory

**(c)** Missile acceleration **(d)** Ballistic time

**79.** The ballistic missiles are useful only for:

**(a)** Long range **(b)** Vertical range

**(c)** Short range **(d)** Normal range

**80.** For long range, the missiles used are called:

**(a)** Long range missiles **(b)** Normal missiles

**(c)** Guided missiles **(d)** Rocket missiles

**81.** An object can have a constant speed even its velocity is:

**(a)** Constant **(b)** Changing

**(c)** Zero **(d)** Maximum

**82.** The system in which no external force acts called:

**(a)** Inertial system **(b)** Isolated system

**(c)** Non-material system **(d)** Thermal system

**83.** When there is no loss of K.E and momentum then the collision is called:

**(a)** Elastic collision **(b)** In-elastic collision

**(c)** Inertial collision **(d)** None of these

**84.** The ballistic trajectory is the path followed by:

**(a)** The powered guided missile **(b)** An un-powered and guided missile

**(c)** An un-powered and un-guided missile **(d)** None of these

**85.** The range of projectile is directly proportional to the:

**(a)** $\sin 2\theta$ **(b)** $\sin^2\theta$

**(c)** $\cos^2\theta$ **(d)** $\tan^2\theta$

**86.** The magnitude of vertical and horizontal range will be equal if angle of projection is:

**(a)** 120° **(b)** 45°

**(c)** 70° **(d)** 76°

**87.** A rocket propulsion is based on the principle of:

**(a)** Law of conservation of mass **(b)** Law of conservation of energy

**(c)** Law of conservation of momentum **(d)** None of these

**88.** The path of projectile is determined by:

**(a)** Magnetic field **(b)** Gravitational field

**(c)** Electric field **(d)** Electromagnetic field

**89.** The equation of parabola is:

**(a)** $y = bx - ax^2$ **(b)** $y = ax - bx^2$

**(c)** Both (a) and (b) **(d)** None of these

**90.** In a projectile motion, the horizontal range R depends upon:

**(a)** Angle of projection **(b)** Initial velocity

**(c)** Both (a) and (b) **(d)** None of these

**91.** The horizontal component of a projectile moving with initial velocity of 200 m/s at an angle of 60° to x-axis is:

**(a)** 100 m/s **(b)** 250 m/s

**(c)** 50 m/s **(d)** 200 m/s

**92.** The velocity of projectile is maximum at:

**(a)** Highest point **(b)** One forth of height

**(c)** Half of height **(d)** Before striking the ground

**93.** Horizontal range of projectile is:

**(a)** Equal to height **(b)** One fourth of height

**(c)** One half of height **(d)** Double of height

**94.** A force of 15 N acts on a body of mass 5 kg for 5 sec. to a distance of 10 cm, the rate of change of momentum is:

**(a)** 75 N **(b)** 45 N

**(c)** 15 N **(d)** 30 N

**95.** A fighter plane is chasing another plane, when it opens fire its speed.

**(a)** Increases **(b)** Decreases

**(c)** Remains same **(d)** It stops

**96.** If the horizontal range of a projectile is four times its maximum height, the angle of projection is:

**(a)** 30° **(b)** 45°

**(c)** $\sin^{-1}\left(\frac{1}{4}\right)$ **(d)** $\tan^{-1}\left(\frac{1}{4}\right)$

**97.** A train covers the first half distance between two stations at a speed of 40 $kmh^{-1}$ and the other half at 60 $kmh^{-1}$ then its average speed is:

**(a)** 45 $kmh^{-1}$ **(b)** 48 $kmh^{-1}$

**(c)** 40 $kmh^{-1}$ **(d)** None of these

**98.** During the projectile motion, the horizontal component of velocity.

**(a)** Changes with time **(b)** Becomes zero


**(c)** Remains constant **(d)** Increases with time

**99.** A ball is projected at angle of 45° to the horizontal. If the horizontal range is 20 m, the maximum height to which the ball rises is:

**(a)** 2.5 m **(b)** 5.0 m

**(c)** 7.5 m **(d)** 10 m

**100.** In the following velocity time graph, the distance travelled by the body in metres is:

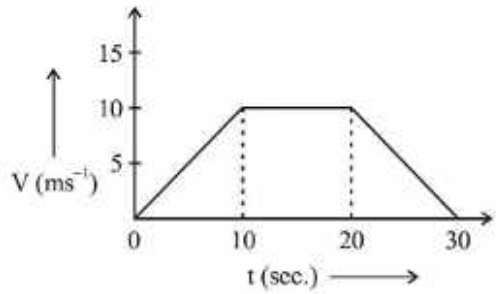


**(a)** 200

**(b)** 250

**(c)** 300

**(d)** 400

**101.** Newton's first law of motion gives definition of:

**(a)** Mass **(b)** Force

**(c)** Acceleration **(d)** Speed

**102.** Motion of rocket is based upon:

**(a)** Newton's third law of motion **(b)** Law of conservation of momentum

**(c)** Newton's law of gravitation **(d)** Both (a) and (b)

**103.** The acceleration of projectile at the highest point is:

**(a)** Zero **(b)** Increases

**(c)** Decreases **(d)** Constant

**104.** A force of 12 N gives an acceleration 4 $ms^{-2}$ to an object. The force required to give it an acceleration of 10 $ms^{-2}$ is:

**(a)** 15 N **(b)** 20 N

**(c)** 25 N **(d)** 30 N

**105.** Acceleration of 1.5 $ms^{-2}$ expressed in $kmh^{-2}$ is:

**(a)** 324 **(b)** 5.4

**(c)** 5400 **(d)** 19440

**106.** A bomb of mass 12 kg initially at rest, explodes into two pieces of masses 4 kg and 8 kg. The speed of the 8 kg mass is 6 $ms^{-1}$. The K.E of the 4 kg mass is:

**(a)** 32 J **(b)** 48 J

**(c)** 114 J **(d)** 288 J

**107.** The range of projectile when launched at an angle of 15° with the horizontal is 1.5 m. Its range, when launched at 45° with the same speed is:

**(a)** 3.0 m **(b)** 1.5 m

**(c)** 6.0 km **(d)** 0.75 km

**108.** For a projectile, the ratio of maximum height reached to the square of flight time is:

**(a)** 5 : 4 **(b)** 5 : 2

**(c)** 5 : 1 **(d)** 10 : 1

**109.** A stone is thrown vertically upward with a velocity of 30 $ms^{-1}$. If the acceleration due to gravity is 10 $ms^{-2}$, what is the distance travelled by the particle during the first second of its motion.

**(a)** 30 m **(b)** 25 m

**(c)** 10 m **(d)** None of these

**110.** A body is dropped from a tower with zero velocity reaches ground in 4 seconds. The height of the tower is about:

**(a)** 80 m **(b)** 20 m

**(c)** 160 m **(d)** 40 m

**111.** A body starting from rest covers a distance of 0.45 km and acquires a velocity of 300 km/h. Its acceleration will be:

**(a)** 0.092 $ms^{-2}$ **(b)** 0.5 $ms^{-2}$

**(c)** 7.71 $ms^{-2}$ **(d)** 0.15 $ms^{-2}$

**112.** The distance covered by a body in time 't' starting from rest is:

**(a)** $\frac{at^2}{2}$ **(b)** vt

**(c)** $\frac{a^2t}{2}$ **(d)** $at^2$

**113.** At what angle, the range and maximum range are equal?

**(a)** 45° **(b)** 90°

**(c)** 60° **(d)** 0°

**114.** A cricket ball is hit so that it travels straight up in air and it can acquires 3 seconds to reach the maximum height. Its initial velocity is:

**(a)** 10 $ms^{-1}$ **(b)** 15 $ms^{-1}$

**(c)** 29.4 $ms^{-1}$ **(d)** 12.2 $ms^{-1}$

**115.** A bullet of mass 10 g hits a target and penetrates 2 cm into it. If the average resistance offered by the target is 100 N then the velocity with which the bullet hits the target is:

**(a)** 10 $ms^{-1}$ **(b)** 1052 $ms^{-1}$

**(c)** 20 $ms^{-1}$ **(d)** $20\sqrt{2}$ $ms^{-1}$

# ANSWERS

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| **1.** | (b) | **2.** | (a) | **3.** | (b) | **4.** | (a) |
| **5.** | (d) | **6.** | (a) | **7.** | (c) | **8.** | (c) |
| **9.** | (d) | **10.** | (d) | **11.** | (a) | **12.** | (a) |
| **13.** | (a) | **14.** | (a) | **15.** | (c) | **16.** | (c) |
| **17.** | (a) | **18.** | (c) | **19.** | (d) | **20.** | (d) |
| **21.** | (c) | **22.** | (a) | **23.** | (d) | **24.** | (a) |
| **25.** | (c) | **26.** | (b) | **27.** | (a) | **28.** | (b) |
| **29.** | (c) | **30.** | (b) | **31.** | (c) | **32.** | (b) |
| **33.** | (a) | **34.** | (b) | **35.** | (a) | **36.** | (c) |
| **37.** | (d) | **38.** | (b) | **39.** | (a) | **40.** | (d) |
| **41.** | (b) | **42.** | (b) | **43.** | (c) | **44.** | (c) |
| **45.** | (a) | **46.** | (c) | **47.** | (d) | **48.** | (b) |
| **49.** | (c) | **50.** | (a) | **51.** | (b) | **52.** | (b) |
| **53.** | (a) | **54.** | (b) | **55.** | (c) | **56.** | (c) |
| **57.** | (a) | **58.** | (b) | **59.** | (c) | **60.** | (a) |
| **61.** | (b) | **62.** | (c) | **63.** | (d) | **64.** | (a) |
| **65.** | (b) | **66.** | (b) | **67.** | (a) | **68.** | (a) |
| **69.** | (b) | **70.** | (d) | **71.** | (c) | **72.** | (c) |
| **73.** | (a) | **74.** | (c) | **75.** | (a) | **76.** | (d) |
| **77.** | (a) | **78.** | (b) | **79.** | (c) | **80.** | (c) |
| **81.** | (b) | **82.** | (b) | **83.** | (a) | **84.** | (c) |
| **85.** | (a) | **86.** | (d) | **87.** | (c) | **88.** | (b) |
| **89.** | (b) | **90.** | (c) | **91.** | (a) | **92.** | (a) |
| **93.** | (a) | **94.** | (c) | **95.** | (b) | **96.** | (b) |
| **97.** | (b) | **98.** | (c) | **99.** | (b) | **100.** | (a) |
| **101.** | (b) | **102.** | (d) | **103.** | (d) | **104.** | (d) |
| **105.** | (d) | **106.** | (d) | **107.** | (a) | **108.** | (a) |
| **109.** | (b) | **110.** | (a) | **111.** | (c) | **112.** | (a) |
| **113.** | (a) | **114.** | (c) | **115.** | (c) | | |

# SHORT QUESTIONS

**3.1 What is the difference between uniform and variable velocity. From the explanation of variable velocity, define acceleration. Give SI units of velocity and acceleration.**

**Ans.** **Uniform Velocity:** The velocity of a body is said to be uniform if it covers equal displacement in equal interval of time.

**Variable Velocity:** The velocity of a body is said to be variable if it covers unequal displacement in unequal interval of time.

**Acceleration:** From the variable velocity, the rate of change of velocity is called acceleration.

Let a body is moving with velocity $\vec{v}_i$. After small time $\Delta t$ its velocity changes from $\vec{v}_i$ to $\vec{v}_f$ then the change in velocity $\vec{\Delta v} = \vec{v}_f - \vec{v}_i$. So

$$\vec{a} = \frac{\vec{v}_f - \vec{v}_i}{\Delta t}$$

$$\vec{a} = \frac{\vec{\Delta v}}{\Delta t}$$

**SI Unit of Velocity:** The SI unit of velocity is m/s or km/hr.

**SI Unit of Acceleration:** The SI unit of acceleration is $m/s^2$.

**3.2 An object is thrown vertically upward. Discuss the sign of acceleration due to gravity, relative to velocity, while the object is in air.**

**Ans.** When an object is thrown vertically upward, the sign of acceleration due to gravity is negative relative to velocity. But when the object is thrown downward, the sign of acceleration due to gravity is taken as positive because velocity and acceleration are in same direction.

**3.3 Can the velocity of an object reverse direction when acceleration is constant? If so, give an example.**

**Ans.** Yes, the velocity of an object can reverse its direction when acceleration is constant.

***Example:*** When an object is thrown vertically upward then during upward motion its velocity decreases, the direction of velocity will be in upward while direction of acceleration due to gravity will be in downward and when it reach at the highest point its velocity become zero but during downward of object the direction of velocity will be in downward while direction of acceleration due to gravity will again in downward thus we see that in this case the velocity reverse the direction while acceleration is constant.

**3.4 Specify the correct statements:**

**(a) An object can have a constant velocity even its speed is changing.**

**(b) An object can have a constant speed even its velocity is changing.**

**(c) An object can have a zero velocity even its acceleration is not zero.**

**(d) An object subjected to a constant acceleration can reverse its velocity.**

**Ans.** (a) It is false statement because an object cannot have a constant velocity even its speed is changing.

(b) It is true when the object is moving along a circular path.

(c) It is true because when an object is thrown vertically upward, at maximum height, velocity is zero but acceleration is not zero, it is a = g.

(d) It is true. Yes an object subjected to a constant acceleration can reverse its velocity.

**3.5 A man standing on the top of a tower throws a ball straight up with initial velocity $v_i$ and at the same time throws a second ball straight downward with the same speed. Which ball will have larger speed when it strikes the ground? Ignore air friction.**

**Ans.** Both the balls have the same speed on striking the ground but time is different. When the velocity of the ball thrown upward with initial velocity $v_i$, it will has same velocity $v_i$ when it return back and passes the man so as the initial velocities of a ball is same for both cases, therefore the final velocities will also be same.

**3.6 Explain the circumstances in which the velocity "v" and acceleration "a" of a car are:**


**(i) Parallel** **(ii) Anti-parallel**

**(iii) Perpendicular to one another** **(iv) "v" is zero but "a" is not**


**(v) "a" is zero but "v" is not zero**

**Ans.** Following are the circumstances when velocity and acceleration of car:


**(i) Parallel:** When the velocity of a car is increasing along a straight path then velocity and acceleration are parallel to each other.




**(ii) Anti-parallel:** When the velocity of car is decreasing along the straight line then velocity and acceleration are anti-parallel to each other.




**(iii) Perpendicular to one another:** The velocity and acceleration of a car are perpendicular to each other when the car is moving along a circular path.




**(iv) v is zero but a is not zero:** The velocity of a car becomes to zero when the brakes are applied and the car comes to rest due to acceleration in opposite direction.

**(v) a is zero but v is not zero:** Acceleration is zero when the car is moving with uniform acceleration.

**3.7 Motion with constant velocity is a special case of motion with constant acceleration. Is this statement true? Discuss.**

**Ans.** Yes, the motion with constant velocity is a special case of motion with constant acceleration. This statement is true.

***Explanation:*** we know that when a body moves with constant velocity then its acceleration will be zero i.e., there is no rate of change of velocity so whenever it moves with constant velocity its acceleration will remain zero that is constant here zero is also a constant quantity. Therefore motion with constant velocity is a special case of motion with constant acceleration.

**3.8 Find the change in momentum for an object subjected to a given force for a given time and state law of motion in terms of momentum.**

**Ans.** Consider a body of mass "m" moving with velocity $v_i$. Let a force F is applied on the body which changes the velocity from $v_i$ to $v_f$ then according to 1st equation of motion.

$$v_f = v_i + at$$

$$a = \frac{v_f - v_i}{t}$$

But from Newton's second law of motion

$$F = ma$$

$$F = m\left(\frac{v_f - v_i}{t}\right)$$

$$F = \frac{mv_f - mv_i}{t}$$

Where $mv_f$ is the final momentum and $mv_i$ is the initial momentum so,

$$\frac{mv_f - mv_i}{t} = \text{Rate of change of momentum}$$

$$F = \text{Rate of changed momentum}$$

**Newton's Second Law of Motion in Terms of Momentum:** Newton's second law of motion in terms of momentum states, "the rate of change of momentum is equal to applied force".

**3.9 Define impulse and show that how it is related to linear momentum?**

**Ans.** **Impulse:** When a very large force acts on a body for a very short interval of time then the product of such a force and time is called impulse. It is a vector quantity

$$\text{Impulse} = I = \text{Force} \times \text{Time}$$

$$I = F \times \Delta t$$

As we know that

$$F \times \Delta t = mv_f - mv_i$$

So

$$I = mv_f - mv_i$$

$$\vec{I} = m\vec{\Delta v}$$

$$\vec{I} = \vec{\Delta P} = \text{Change in momentum}$$

This shows that impulse is equal to change in momentum.

**3.10 State the law of conservation of linear momentum, pointing out the importance of isolated system. Explain, why under certain conditions, the law is useful even though the system is not completely isolated?**

**Ans.** **Law of Conservation of Linear Momentum:** This law states that the total linear momentum of an isolated system remains constant.

**Importance of an Isolated System:** This law holds good only for isolated system. An isolated system is one at which there is no external force acting. If the system is not isolated but the external forces are very small as compared to interacting forces so this law can also be applied on such a system.

**3.11 Explain the difference between elastic and inelastic collisions. Explain how would a bouncing ball behave in each case? Give plausible reasons for the fact that K.E is not conserved in most cases?**

**Ans.** **Elastic Collision:** These collision in which kinetic energy remains constant is called elastic collisions.

**Inelastic Collision:** These collision in which kinetic energy does not remain constant is called inelastic collisions.

**In Case of Bouncing Ball:** If the ideal bouncing ball returns to the same height where it is dropped then the collision is elastic collision. If the bouncing ball will not returned to the same height then the collision is inelastic. So due to change of energy, kinetic energy does not remain constant.

**For example;** when a heavy ball is dropped on to the surface of earth, it rebounds upto very little height because maximum K.E is lost due to friction and also changes into heat and sound energies. So in most cases, the K.E is not conserved. Thus momentum and K.E are conserved in all types of collisions. However the K.E is conserved only in elastic collision.

**3.12 Explain what is meant by projectile motion. Derive expressions for**

**(a) The time of flight (b) The range of projectile.**


**Show that the range of projectile is maximum when projectile is thrown at an angle of 45° with the horizontal.**

**Ans.** **Projectile Motion:** When an object is thrown in air making a certain angle with horizontal, so that object moves under the action of gravity and moves along a curved path, is called as "projectile". Its motion is called "projectile motion". Its path is called trajectory. Its path is parabolic. **(OR)** Projectile motion is two dimensional motion under constant acceleration due to gravity.

The body thrown is called projectile and the curved path followed by it is called trajectory.

**Examples:**

1. Motion of football kicked off by a player.
2. A ball thrown by a cricketer.
3. Missile fired from launching pad.

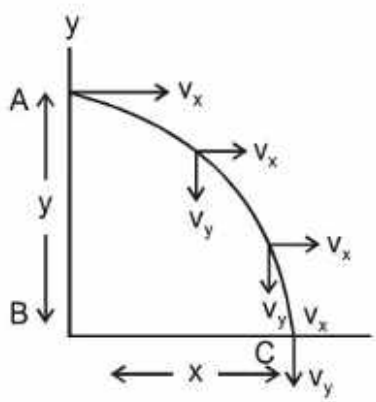


Consider a body thrown in horizontal direction with horizontal velocity $v_x$ from point A having vertical height 'y'. In the absence of horizontal force, the horizontal components $v_x$ remain constant all along the motion. If the body hits at point 'C' the horizontal distance 'x' covered by the body is given by

$$x = v_x t$$

Where 't' is the time taken by body to move from A to C.

The body not only covers distance in forward direction but also moves down under the action of gravity. The downward vertical velocity of body under the action of gravity goes on increasing continuously. This vertical motion is same as for freely falling body. The distance covered by body in downward direction is AB = y and is given by

$$S = y = v_{iy}t + \frac{1}{2}at^2$$

As the ball at 'A' has only the horizontal velocity so

$$v_{iy} \text{ (initial vertical velocity)} = 0 \quad \text{and} \quad a = g$$

So $$y = \frac{1}{2} gt^2$$

$$\boxed{y = \frac{1}{2} gt^2}$$

**Time of Flight of Projectile:** The time taken by body to cover the distance from place of projection to the place where it hits the ground, is called time of flight of projectile. The time of flight can be calculated by using 2nd equation of motion:


$$S = v_i t + \frac{1}{2} gt^2$$

As the ball returns to ground, so net vertical distance is zero. i.e.,

$$S = 0 \quad \text{and} \quad v_i = v_{iy} = v_i \sin \theta$$

The above equation becomes

$$0 = v_i \sin \theta t - \frac{1}{2} gt^2$$

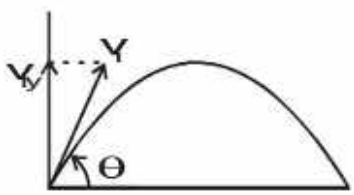


$$\frac{1}{2} gt^2 = v_i \sin \theta t \quad \text{or} \quad \frac{1}{2} gt = v_i \sin \theta$$

or $$t = \frac{2v_i \sin \theta}{g}$$

Where 't' is the time of flight of projectile.

**Range of Projectile:** Max. distance which a projectile conversion the horizontal direction is called the range of projectile. In order to find R

$$R = v_{ix} \times t$$

$$= \frac{v_i \cos \theta \times 2v_i \sin \theta}{g}$$

$$= \frac{v_i^2}{g} 2 \sin \theta \cos \theta$$

$$R = \frac{v_i^2}{g} \sin 2\theta$$

The formula for the **range of projectile** is

$$R = \frac{v_i^2 \sin 2\theta}{g}$$

For maximum horizontal range sin 2θ must have maximum value and we know that the maximum value of sin 2θ is 1.

$\because$ $$\sin 2\theta = 1$$

$$\sin 2\theta = \sin 90°$$

$$2\theta = 90°$$

$$\theta = 45°$$

So above equation becomes

$$R_{max.} = \frac{v_i^2 \sin 2(45°)}{g}$$

$$R_{max.} = \frac{v_i^2 \sin 90°}{g}$$

$$R_{max.} = \frac{v_i^2}{g}$$

So the range of projectile is maximum when projectile is thrown at an angle of 45° with the horizontal.

**3.13 At what point or points in its path does a projectile have its minimum speed, its maximum speed?**

**Ans.** The speed of the projectile is maximum at the point of projection and also at the point where it hits the ground. While the speed of projectile is minimum when it reaches the maximum height.

**3.14 Each of the following questions is followed by four answers, one of which is correct answer. Identified that answer.**

**(i) What is meant by a ballistic trajectory?**

**(a) The paths followed by an un-powered and unguided projectile is called ballistic trajectory.**

**(b) The path followed by the powered and unguided projectile is called ballistic trajectory.**

**(c) The path followed by un-powered but guided projectile.**

**(d) The path followed by powered and guided projectile.**

**(ii) What happens when two-body system undergoes elastic collision?**

**(a) The momentum of the system changes.**

**(b) The momentum of the system does not change.**

**(c) The bodies come to rest after collision.**

**(d) The energy conservation law is violated.**

**Ans. (i)** (a) is correct.

**(ii)** (b) is correct.

# PROBLEMS WITH SOLUTIONS

## *PROBLEM 3.1*

**A helicopter is ascending vertically at the rate of 19.6 $ms^{-1}$. When it is at a height of 156.8 m above the ground, a stone is dropped. How long does the stone take to reach the ground?**

## METHOD-I

### *Data*

Initial vertical velocity of helicopter $= v_i = 19.6$ m/s

Since initial velocity of the stone is upward and stone moves downward.

$\therefore$ Vertical distance travelled by stone $= S = -156.8$ m

### *To Find*

Time taken by stone to reach the ground $= t = ?$

## *SOLUTION*

By using 2nd equation of motion

$$S = v_i t + \frac{1}{2} g t^2$$

$$-156.8 = 19.6\,t + \frac{1}{2} \times -9.8\,t^2$$

$$-156.8 = 19.6\,t - 4.9\,t^2$$

$$4.9\,t^2 = -19.6\,t - 156.8 = 0$$

Dividing by 4.9

$$t^2 - 4t - 32 = 0$$

$$t^2 - 8t + 4t - 32 = 0$$

$$t(t-8) + 4(t-8) = 0$$

$$(t-8)(t+4) = 0$$

$$t - 8 = 0 \quad , \quad t + 4 = 0$$

$$t = 8 \text{ sec.} \quad , \quad t = -4 \text{ sec.}$$

Since time is always positive so ignoring the negative time hence.

### *Result*

Time taken by stone $= t = 8$ sec.

## METHOD-II

### *Data*

Initial vertical velocity of helicopter $= v_i = -19.6$ m/s

Vertical distance $= S = 156.8$ m

### *To Find*

Time taken by stone to reach the ground $= t = ?$

### *SOLUTION*

By using the 2nd equation of motion

$$S = v_i t + \frac{1}{2} g t^2$$

$$156.8 = -19.6\, t + \frac{1}{2} \times 9.8\, t^2$$

$$156.8 = -19.6\, t + 4.9\, t^2$$

Divide by 4.9

$$\frac{156.8}{4.9} = \frac{-19.6}{4.9} t + \frac{4.9}{4.9} t^2$$

$$32 = -4t + t^2$$

$$t^2 - 4t - 32 = 0$$

$$t^2 - 8t + 4t - 32 = 0$$

$$t(t-8) + 4(t-8) = 0$$

$$(t+4)(t-8) = 0$$

$$t + 4 = 0 \;,\; t - 8 = 0$$

$t = -4$ sec. (neglected), $t = 8$ sec.

### *Result*

Time taken by stone to reach the ground $= t = 8$ sec.

### *PROBLEM 3.2*

**Using the following data, draw a velocity-time graph for a short journey on a straight road of a motorbike.**

| Velocity ($ms^{-1}$) | 0 | 10 | 20 | 20 | 20 | 20 | 0 |
|---|---|---|---|---|---|---|---|
| Time (s) | 0 | 30 | 60 | 90 | 120 | 150 | 180 |

**Use the graph to calculate**


**(a) The initial acceleration**

**(b) The final acceleration**

**(c) The total distance travelled by the motorcyclist.**

## *SOLUTION*

The velocity time graph is as shown.

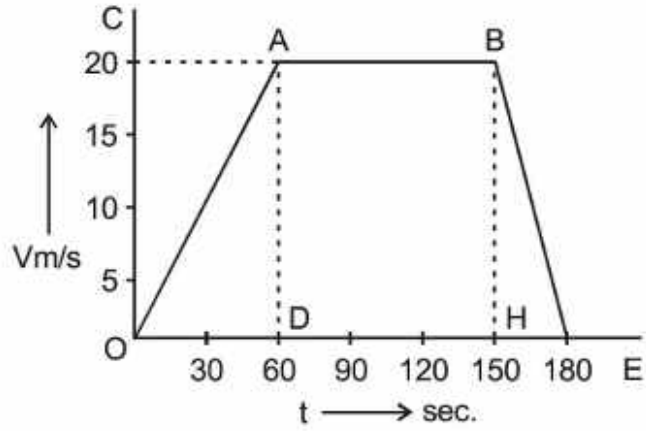


**(a) For initial acceleration**

Initial acceleration

$$a_i = \frac{\text{Change in velocity}}{\text{Time}}$$

$$a_i = \frac{\Delta v}{\Delta t}$$

Since $\Delta v = 20$ m/s

$\Delta t = 60$ sec.

So, $a_i = \frac{20}{60}$

$= \frac{1}{3}$ m/s$^2$

$a_i = 0.33$ m/s$^2$

**(b) For final acceleration**

$$a_f = \frac{\text{Change in velocity}}{\text{Time}}$$

Since $\Delta v = v_f - v_i$

$= 0 - 20$

$= -20$ m/s

and $\Delta t = 30$ sec.

$a_f = \frac{-20}{30}$

$a_f = -0.67$ m/s$^2$

**(c) For total distance travelled by motorcyclist**

Total distance = Area of $\Delta OAD$ + Area of rectangle ABHD + Area of $\Delta BHE$

Thus;

Area of $\Delta OAD = \frac{1}{2}$ Base × Height

$= \frac{1}{2} \times 60 \times 20$

$= 600$ m

Area of rectangle ABHD = Length × Breadth

$= 90 \times 20$

$= 1800$ m/s

$$\text{Area of } \Delta BHE = \frac{1}{2} \text{ Base} \times \text{Height}$$

$$= \frac{1}{2} \times 30 \times 20$$

$$= 300 \text{ m}$$

Putting in above equation

$$\text{Total distance travelled} = 600 + 1800 + 300$$

$$= 2700 \text{ m}$$

$$= 2.7 \text{ km}$$

### *Result*

(a) Initial acceleration = $a_i = 0.33 \text{ m/s}^2$

(b) Final acceleration = $a_f = -0.67 \text{ m/s}^2$

(c) Total distance travelled by motorcyclist = 2.7 km

## *PROBLEM 3.3*

**A proton moving with speed of $1.0 \times 10^7 \text{ ms}^{-1}$ passes through a 0.02 cm thick sheet of paper and emerges with a speed of $2.0 \times 10^6 \text{ ms}^{-1}$. Assuming uniform deceleration, find retardation and time taken to pass through the paper.**

### *Data*

Initial speed of proton = $v_i = 1.0 \times 10^7 \text{ m/s}$

Distance covered = $S = 0.02 \text{ cm}$

$= 2 \times 10^{-4} \text{ m}$

Final speed of proton = $v_f = 2.0 \times 10^6 \text{ m/s}$

### *To Find*

Retardation (negative acceleration) = $a = ?$

Time taken = $t = ?$

## *SOLUTION*

For the retardation by using 3rd equation of motion

$$2as = v_f^2 - v_i^2$$

$$2a \times 2 \times 10^{-4} = (2 \times 10^6)^2 - (1.0 \times 10^7)^2$$

$$4 \times 10^{-4} a = 4 \times 10^{12} - 1.0 \times 10^{14}$$

$$= 10^{12} (4 - 1.0 \times 10^2)$$

$$= 10^{12} (4 - 100)$$

$$4 \times 10^{-4} a = -96 \times 10^{12}$$

$$a = \frac{-96 \times 10^{12}}{4 \times 10^{-4}}$$

$$a = -24 \times 10^{16}$$

$$a = -2.4 \times 10^{17}\ m/s^2$$

Negative sign shows retardation.

For the time taken, by using 1st equation of motion

$$v_f = v_i + at$$

$$t = \frac{v_f - v_i}{a}$$

$$= \frac{2.0 \times 10^6 - 1.0 \times 10^7}{-2.4 \times 10^{17}}$$

$$= \frac{10^6 (2 - 1.0 \times 10)}{-2.4 \times 10^{17}}$$

$$= \frac{10^6 (2 - 10)}{-2.4 \times 10^{17}}$$

$$= \frac{-8 \times 10^6}{-2.4 \times 10^{17}}$$

$$= 3.3 \times 10^{6-17}$$

$$= 3.3 \times 10^{-11}\ sec.$$

### *Result*

Retardation (negative acceleration) = a = $-2.4 \times 10^7\ m/s^2$

Time taken = t = $3.3 \times 10^{-11}$ sec.

## *PROBLEM 3.4*

**Two masses $m_1$ and $m_2$ are initially at rest with a spring compressed between them. What is the magnitude of ratio of their velocities after the spring has been released?**

### *Data*

1st mass = $m_1$

2nd mass = $m_2$

Initial velocity of mass $m_1$ = $v_i$ = 0

Initial velocity of mass $m_2$ = $v_i$ = 0

### *To Find*

Ratio of their velocities = $\frac{v_1}{v_2}$ = ?

## SOLUTION

According to law of conservation momentum

$$m_1v_i + m_2v_i = m_1v_1 + m_2v_2$$

Therefore;

$$m_1v_1 + m_2v_2 = 0$$

$$m_1v_1 = -m_2v_2$$

$$\frac{v_1}{v_2} = -\frac{m_2}{m_1}$$

### Result

Hence after releasing the spring, the ratio of magnitude of their velocities is equal to the inverse ratio of their masses.

## PROBLEM 3.5

**An amoeba of mass $1.0 \times 10^{-12}$ kg propels itself through water by blowing a jet of water through a tiny orifice. The amoeba ejects water with a speed of $1.0 \times 10^{-4}$ $ms^{-1}$ and at a rate of $1.0 \times 10^{-13}$ $kgs^{-1}$. Assume that the water is being continuously replenished so that the mass of the amoeba remains the same.**

**(a) If there were no force on amoeba other than the reaction force caused by the emerging jet, what would be the acceleration of the amoeba?**

**(b) If amoeba moves with constant velocity through water, what is force of surrounding water (exclusively of jet) on the amoeba?**

### Data

Mass of amoeba $= m = 1.0 \times 10^{-12}$ kg

Speed of ejected water $= v = 1.0 \times 10^{-4}$ m/s

Rate of water $= \frac{m}{t} = 1.0 \times 10^{-13}$ kg/s

### To Find

(a) Acceleration of amoeba $= a = ?$

(b) Force of surrounding water $= F = ?$

## SOLUTION

(a) By formula

$$\boxed{F = \frac{m}{t} \times v}$$

$$F = 1.0 \times 10^{-13} \times 1.0 \times 10^{-4}$$

$$= 1.0 \times 10^{-17} \text{ N}$$

So by second law of motion

$$F = ma$$

$$a = \frac{F}{m}$$

$$a = \frac{1.0 \times 10^{-17}}{1.0 \times 10^{-12}}$$

$$= 1.0 \times 10^{-17+12}$$

$$= 1.0 \times 10^{-5}\ m/s^2$$

(b) The force of surrounding water is

$$F = \frac{m}{t} \times v$$

$$= 1.0 \times 10^{-13} \times 1.0 \times 10^{-4}$$

$$= 1.0 \times 10^{-17}\ N$$

***Result***

(a) Acceleration of amoeba = a = $1.0 \times 10^{-5}\ m/s^2$

(b) Force of surrounding water = F = $1.0 \times 10^{-17}\ N$

## *PROBLEM 3.6*

**A boy places a fire cracker of negligible mass in an empty can of 40 g mass. He plugs the end with a wooden block of mass 200 g. After igniting the firecracker, he throws the can straight up. It explodes at the top of its path. If the block shoots out with a speed of 3 $ms^{-1}$, how fast will the can be going?**

***Data***

Mass of can = $m_1$ = 40 g = 0.04 kg

Mass of wooden block = $m_2$ = 200 g

= 0.2 kg

Speed of wooden block = $v_2'$ = 3 m/s

***To Find***

Speed of can = $v_1'$ = ?

## *SOLUTION*

According to law of conservation of momentum

Momentum before explosion = Momentum after explosion

$$m_1v_1 + m_2v_2 = m_1v_1' + m_2v_2'$$

$$0 = m_1v_1' + m_2v_2'$$

$$m_1v_1' = -m_2v_2'$$

$$\boxed{v_1' = -\frac{m_2 v_2}{m_1}}$$

$$= -\frac{0.2 \times 3}{0.04}$$

$$= -15 \text{ m/s}$$

***Result***

Speed of can $= v_1' = 15$ m/s

–ve sign shows that the can and wooden block moves in opposite direction.

## *PROBLEM 3.7*

**An electron ($m = 9.1 \times 10^{-31}$ kg) traveling at $2.0 \times 10^7$ $ms^{-1}$ undergoes a head on collision with a hydrogen atom ($m = 1.67 \times 10^{-27}$ kg) which is initially at rest. Assuming the collision to be perfectly elastic and a motion to be along a straight line, find the velocity of hydrogen atom?**

***Data***

Mass of electron $= m_1 = 9.1 \times 10^{-31}$ kg

Velocity of electron $= v_1 = 2.0 \times 10^7$ m/s

Mass of hydrogen atom $= m_2 = 1.67 \times 10^{-27}$ kg

Velocity of hydrogen atom $= v_2 = 0$

***To Find***

Velocity of hydrogen atom $= v_2' = ?$

## *SOLUTION*

$$\boxed{v_2' = \frac{2m_1 v_1}{m_1 + m_2}}$$

$$v_2' = \frac{2 \times 9.1 \times 10^{-31} \times 2.0 \times 10^7}{9.1 \times 10^{-31} + 1.67 \times 10^{-27}}$$

$$= \frac{36.4 \times 10^{-31+7}}{10^{-27}(9.1 \times 10^{-4} + 1.67)}$$

$$= \frac{36.4 \times 10^{-24+27}}{0.00091 + 1.67}$$

$$= \frac{36.4 \times 10^3}{1.67091}$$

$$= 21.78 \times 10^3$$

$$= 2.18 \times 10^4 \text{ m/s}$$

***Result***

Velocity of hydrogen atom $= v_2' = 2.18 \times 10^4$ m/s

## *PROBLEM 3.8*

**A truck weighing 2500 kg and moving with a velocity of 21 $ms^{-1}$ collides with a stationary car weighing 1000 kg. The truck and the car move together after the impact. Calculate their common velocity.**

### *Data*

Mass of truck $= m_1 = 2500$ kg

Velocity of truck $= v_1 = 21$ m/s

Mass of car $= m_2 = 1000$ kg

Velocity of car $= v_2 = 0$

### *To Find*

Common velocity after collision $= v = ?$

## *SOLUTION*

According to law of conservation of momentum

$$m_1v_1 + m_2v_2 = m_1v_1' + m_2v_2'$$

Since $v_1' = v_2' = v$

$$m_1v_1 + m_2v_2 = m_1v + m_2v$$

$$m_1v_1 + m_2v_2 = (m_1 + m_2)v$$

$$\boxed{v = \frac{m_1v_1 + m_2v_2}{m_1 + m_2}}$$

Putting values

$$v = \frac{2500 \times 21 + 1000 \times 0}{2500 + 1000}$$

$$= \frac{52500}{3500}$$

$$v = 15 \text{ m/s}$$

### *Result*

Common velocity of truck and car after collision $= v = 15$ m/s

## *PROBLEM 3.9*

**Two blocks of masses 2.0 kg and 0.5 kg are attached at the two ends of a compressed spring. The elastic potential energy stored in the spring in 10 J. Find the velocities of the blocks if the spring delivers its energy to the blocks when released.**

### *Data*

Mass of $1^{st}$ block $= m_1 = 2.0$ kg

Mass of $2^{nd}$ block $= m_2 = 0.5$ kg

Elastic potential energy $= P.E = 10$ J

## *To Find*

Velocity of mass $m_1 = v'_1 = ?$

Velocity of mass $m_2 = v'_2 = ?$

## *SOLUTION*

According to law of conservation of energy

$$\frac{1}{2}m_1v_1^2 + \frac{1}{2}m_2v_2^2 = \frac{1}{2}m_1v'^2_1 + \frac{1}{2}m_2v'^2_2$$

$$\frac{1}{2}m_1v'^2_1 + \frac{1}{2}m_2v'^2_2 = 10$$

$$m_1v'^2_1 + m_2v'^2_2 = 20$$

$$2v'^2_1 + 0.5v'^2_2 = 20 \qquad \ldots\ldots \text{(i)}$$

And according to law of conservation of momentum

$$m_1v_1 + m_2v_2 = m_1v'_1 + m_2v'_2$$

$$m_1v'_1 + m_2v'_2 = 0$$

$$2v'_1 + 0.5v'_2 = 0$$

$$0.5v'_2 = -2v'_1$$

$$v'_2 = -\frac{2v'_1}{0.5} = -4v'_1$$

$$\boxed{v'_2 = -4v'_1}$$

Putting eq. (i)

$$2v'^2_1 + 0.5(-4v'_1)^2 = 20$$

$$2v'^2_1 + 0.5(16v'^2_1) = 20$$

$$2v'^2_1 + 8v'^2_1 = 20$$

$$10v'^2_1 = 20$$

$$v'^2_1 = \frac{20}{10}$$

$$v'_1 = 1.41 \text{ m/s}$$

and $v'_2 = -4v_1$

$$= -4(1.41)$$

$$v'_2 = -5.65 \text{ m/s}$$

## *Result*

Velocity of mass $m_1 = v'_1 = 1.41$ m/s

Velocity of mass $m_2 = v'_2 = -5.65$ m/s

## *PROBLEM 3.10*

**A football is thrown upward with an angle of 30° with respect to the horizontal. To throw a 40 m pass what must be the initial speed of the ball?**

### *Data*

Angle with horizontal = $\theta = 30°$

Horizontal distance = $R = 40$ m

The value of g = $9.8$ m/s$^2$

### *To Find*

Initial speed of ball = $v_i = ?$

## *SOLUTION*

By formula

$$\boxed{R = \frac{v_i^2 \sin 2\theta}{g}}$$

$$v_i^2 = \frac{R \times g}{\sin 2\theta}$$

$$= \frac{40 \times 9.8}{\sin 2(30)}$$

$$= \frac{392}{0.866}$$

$$\sqrt{v_i^2} = \sqrt{452.64}$$

$$v_i = 21.27$$

$$= 21.3 \text{ m/s}$$

### *Result*

Initial velocity of ball = $v_i = 21.3$ m/s

## *PROBLEM 3.11*

**A ball is thrown horizontally from a height of 10 m with velocity of 21 ms$^{-1}$. How far off it hit the ground and with what velocity?**

### *Data*

Initial horizontal velocity = $v_{ix} = 21$ m/s

Initial vertical velocity = $v_{iy} = 0$

Vertical distance = $y = 10$ m

### *To Find*

Horizontal distance = $R = x = ?$

Velocity to hit the ground = $v = ?$

## *SOLUTION*

Formula for horizontal distance

$$\boxed{x = v_{ix} \times t} \qquad \ldots\ldots \text{(i)}$$

For time

$$y = v_{iy}t + \frac{1}{2} gt^2$$

$$10 = 0 \times t + \frac{1}{2} \times 9.8\, t^2$$

$$10 = 4.9\, t^2$$

$$t^2 = \frac{10}{4.9}$$

$$t^2 = 2.04$$

$$t = 1.42 \text{ sec.}$$

Therefore; putting in eq. (i)

$$x = R = v_{ix} \times t$$

$$= 21 \times 1.42$$

$$= 29.8$$

$$= 30 \text{ m}$$

For velocity

$$v = \sqrt{v_{fx}^2 + v_{fy}^2}$$

As $v_{fx} = v_{ix} = 21$ m/s

and $v_{fy} = v_{iy} + gt$

$$= 0 + 9.8 \times 1.42$$

$$v_{fy} = 13.91 \text{ m/s}$$

So $v = \sqrt{(21)^2 + (13.91)^2}$

$$= \sqrt{441 + 193.48}$$

$$= \sqrt{634.48}$$

$$v = 25.1 \text{ m/s}$$

### *Result*

Horizontal distance = x = R = 30 m

Velocity to hit the ground = v = 25 m/s

## *PROBLEM 3.12*

**A bomber dropped a bomb at a height of 490 m when its velocity along the horizontal was 300 $kmh^{-1}$.**

**(a) At what distance from the point vertically below the bomber at the instant the bomb was dropped, did it strike the ground?**

**(b) How long was it in air?**

### *Data*

Height of bomber $= y = 490$ m

Horizontal velocity $= v_{ix} = 300$ km/hr

$$= \frac{300 \times 1000}{3600}$$

$= 83.3$ m/s

### *To Find*

(a) Horizontal distance $= x = R = ?$

(b) Time in air $= t = ?$

## *SOLUTION*

(a) For horizontal distance

$$\boxed{x = v_{ix} \times t} \qquad \ldots\ldots \text{(i)}$$

For time

$$y = v_{iy}t + \frac{1}{2} gt^2 \quad \text{Since} \quad v_{iy} = 0$$

$$490 = 0 \times t + \frac{1}{2} \times 9.8\, t^2$$

$$490 = 4.9\, t^2$$

$$t^2 = \frac{490}{4.9}$$

$$t^2 = 100$$

$$t = 10 \text{ sec.}$$

So putting in eq. (i), we get

$$x = v_{ix} \times t$$

$$x = 10 \times 83.3$$

$$= 833 \text{ m}$$

(b) Time in air $= t = 10$ sec.

### *Result*

(a) Horizontal distance $= x = 833$ m

(b) Time in air $= t = 10$ sec.

## *PROBLEM 3.13*

**Find the angle of projection of a projectile for which its maximum height and horizontal range are equal.**

### *Data*

The given that

Horizontal range = Maximum height

### *To Find*

Angle of projection = $\theta$ = ?

## *SOLUTION*

As we know that the range of projection is

$$R = \frac{v_i^2 \sin 2\theta}{g}$$

and maximum height is

$$h = \frac{v_i^2 \sin^2 \theta}{2g}$$

Therefore; $R = h$

$$\frac{v_i^2 \sin 2\theta}{g} = \frac{v_i^2 \sin^2 \theta}{2g}$$

$$\sin 2\theta = \frac{\sin^2 \theta}{2}$$

Since $\sin 2\theta = 2 \sin \theta \cos \theta$

$$2 \sin \theta \cos \theta = \frac{\sin^2 \theta}{2}$$

$$2 \cos \theta = \frac{\sin \theta}{2}$$

$$2 \times 2 = \frac{\sin \theta}{\cos \theta}$$

$$\tan \theta = 4$$

$$\theta = \tan^{-1}(4)$$

$$\theta = 75.9$$

$$= 76^\circ$$

### *Result*

Angle of projection = $\theta = 76^\circ$

## *PROBLEM 3.14*

**Prove that for angles of projection, which exceed or fall short of 45° by equal amounts, the ranges are equal.**

## *SOLUTION*

Let the two angles 30° and 60° which exceed or fall short of 45° by equal of 15°.

Now we have to find, the ranges at these two angles so the range of projectile is

$$R = \frac{v_i^2 \sin 2\theta}{g}$$

When $\theta = 30°$

$$R_1 = \frac{v_i^2 \sin 2(30°)}{g}$$

$$R_1 = \frac{v_i^2 \sin 60°}{g}$$

$$R_1 = \frac{0.866\, v_i^2}{g}$$

And when $\theta = 60°$

$$R_2 = \frac{v_i^2 \sin 2(60°)}{g}$$

$$R_2 = \frac{v_i^2 \times 0.866}{g}$$

$$R_2 = \frac{0.866\, v_i^2}{g}$$

Thus $R_1 = R_2$

### *Result*

Hence for angle of projection which exceed or fall short of 45° by equal amounts, the ranges are equal.

## *PROBLEM 3.15*

**A SLBM (submarine launched ballistic missile) is fired from a distance of 3000 km. If the Earth were flat and the angle of launch is 45° with horizontal, find the time taken by SLBM to hit the target and the velocity with which the missile is fired.**

### *Data*

Horizontal distance $= x = 3000$ km

$= 3000 \times 1000$

$= 3 \times 10^6$ m

Angle of launch $= \theta = 45°$

## *To Find*

Time taken by SLBM to hit the ground = t = ?

Velocity of the missile = $v_i$ = ?

## *SOLUTION*

For velocity of the missile

$$R = x = \frac{v_i^2 \sin 2\theta}{g}$$

$$\boxed{v_i^2 = \frac{x \times g}{\sin 2\theta}}$$

$$v_i^2 = \frac{3 \times 10^6 \times 9.8}{\sin 2(45°)}$$

$$v_i^2 = \frac{29.4 \times 10^6}{\sin 90°} \quad \text{Since} \quad \sin 90° = 1$$

$$v_i^2 = 29.4 \times 10^6$$

$$v_i = 5.42 \times 10^3 \text{ m/s}$$

$$= 5.42 \text{ km/s}$$

For time

$$\boxed{t = \frac{2v_i \sin \theta}{g}}$$

$$t = \frac{2(5.42 \times 10^3) \sin 45°}{9.8}$$

$$= \frac{10.84 \times 10^3 \times 0.707}{9.8}$$

$$t = 0.982 \times 10^3$$

$$t = 782 \text{ sec.}$$

$$t = 13 \text{ min.}$$

## *Result*

Time taken by SLMB to hit the ground = t = 13 min.

Velocity of the missile = $v_i$ = 5.42 km/s